

4-Zone Wireless Dimming Panel (2.4GHz)

Model No.: K4


Features

- CR2032 battery powered
- No wiring, easy to realize wireless dimming of PUSH switch
- Compatible with MiBoxer / Mi-Light 2.4G series lamps
- Adopt 2.4G RF wireless transmission technology, control distance 30m
- Supports 4 sets of independent control, unlimited number of lamps
- Dimming range 0.1%-100%




Product Parameters

Name: 4-Zone Wireless Dimming Panel (2.4GHz)	IP Rating:	IP20
Model No.: K4	EMC Standard (EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.1.1
Input Voltage: 3V (CR2032*1PCS)	Safety Standard (LVD):	EN 61347-1: 2015+A1: 2018 EN 61347-2-11: 2001+A1:2019
Transmitting Power: 6dBm	Radio Equipment (RED):	ETSI EN 300 440 V2.2.1
RF: 2.4GHz	Certification:	CE, EMC, LVD, RED
Control Distance: 30m		
Working Temperature: -10~40°C		
Standby Power Consumption: <6μA		

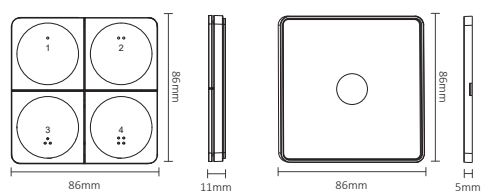


Dimming Control

- Short press to turn on/off the light, long press to adjust the light brightness.
- Supports 4 sets of independent control, unlimited number of lamps




ON/ OFF/ Brightness


Installation




1. Remove up cover




2. Put CR2032 battery into it




3. Return up cover



4. Tear out the back tape





5. Stick the holder on the position where you want




6. Put the rotating switch on the front of holder


Linking Code Instructions

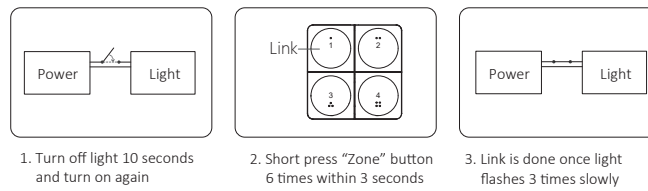

 Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if dimming panel already finished linking)

Unlinking Code Instructions

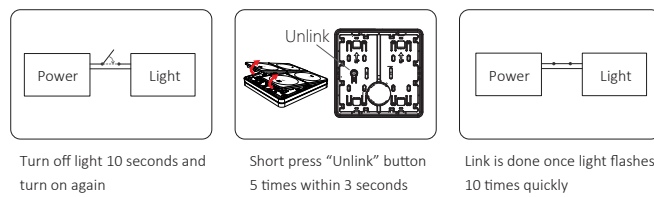

 Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the dimming panel never be linked)

Attention

1. Please do not use it in a humid or high temperature environment for a long time. When not in use for a long time, please remove the battery and store it in a dry, static-free environment.
2. Do not use it in an environment with a large area of metal or near strong electromagnetic waves, otherwise the control distance will be seriously affected.



Made in China