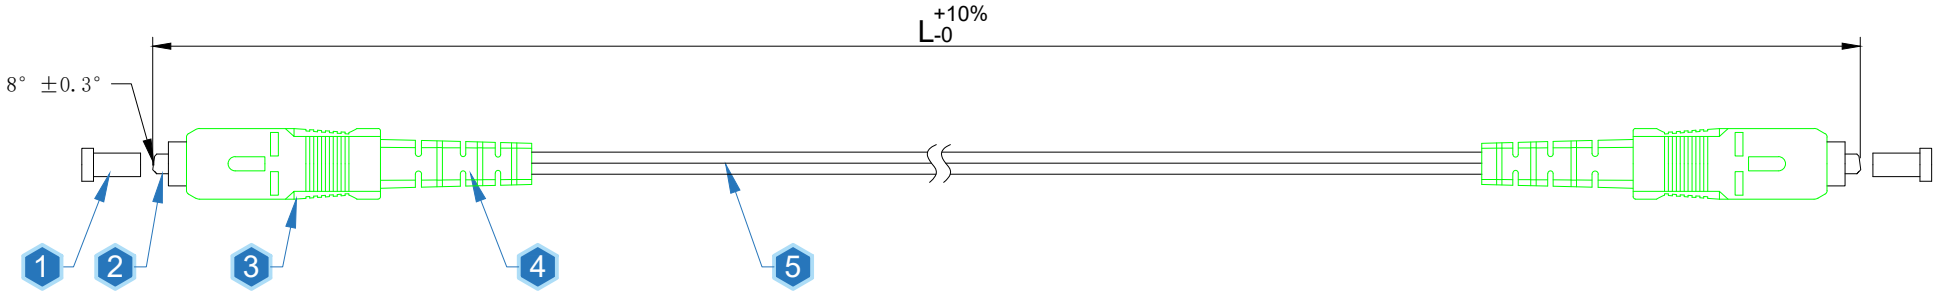

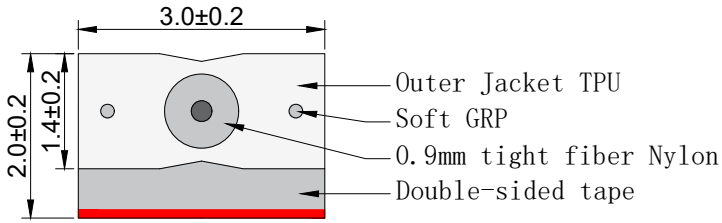

Chart:

ITEM NO.	LENGTH(m)
S215761	15.0
S215762	20.0
S215763	25.0
S215764	30.0

Optical cable physical properties			
Tensile Strength	Short term	N	50
	Long term	N	20
Cable crush resistance	Short term	N/100mm	100
	Long term	N/100mm	50

Note:
RoHS 2011/65/EU and amendment directives (EU) 2015/863 compliant;REACH 1907/2006/EC compliant.

Test Grade Designation:Each to Reference		
Grade IL/RL	Standard	
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss(RL)	≥60dB	IEC 61300-3-6
Test Wavelength	1310nm	
End face inspection	×400	

Packing:1pc/Paper Drum + Pizza Box

MATERIAL LIST:

NO.	SPECIFICATION STANDARD	QT'Y	REMARK
⑤	Self-adhesive transparent cable OS2 G657.B3 9/125um 1.4*3.0±0.2mm TPU Transparent	L	
④	SC Flat Boot Green	2pcs	
③	SC Connector Green	2pcs	
②	SC/APC 8° SM Ceramic Ferrule	2pcs	
①	SC Dust Cap Transparent	2pcs	

SYNERGY 21

CUSTOMER		ITEM NO.	See the chart
PRODUCT NAME	FTTR self-adhesive transparent patch cord SC/APC - SC/APC G657.B3	Manufacture country	CHINA UNIT mm

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	DRAWNBY	CHECKBY	APPOBY	DATE
		NEW	2026-05-21	A0	SYNERGY 21	SYNERGY 21	SYNERGY 21	2026-05-21

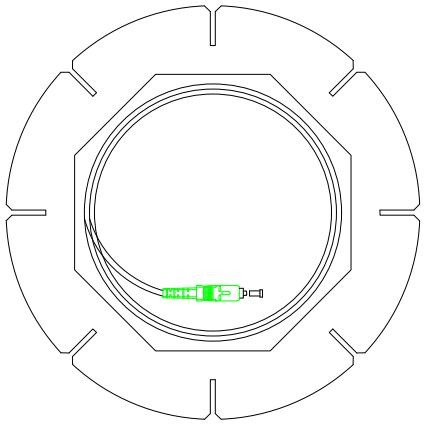

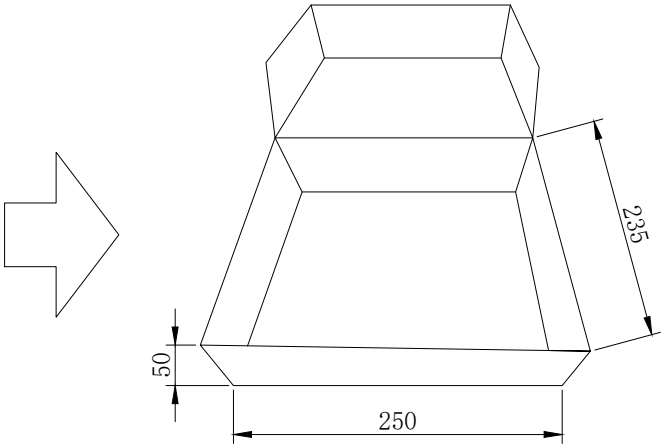

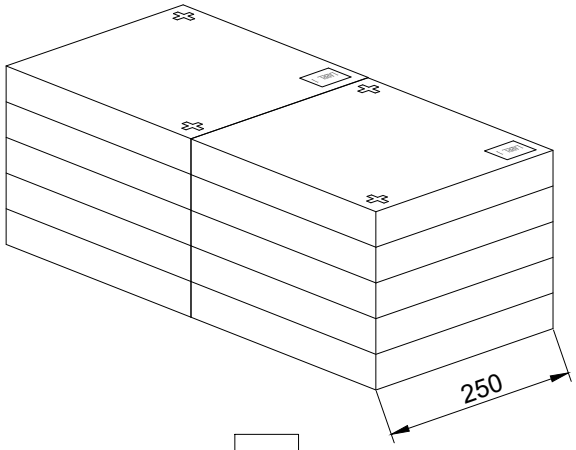

Paper shaft:

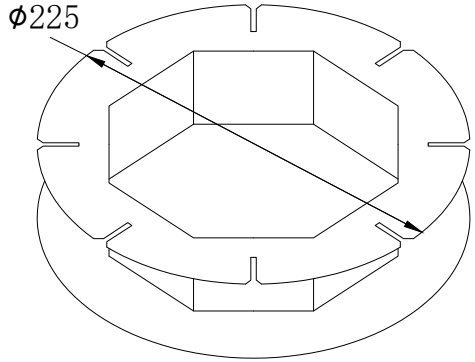

Pizza Box:

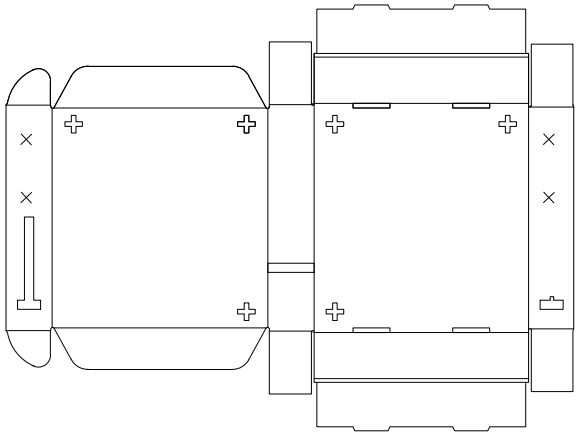

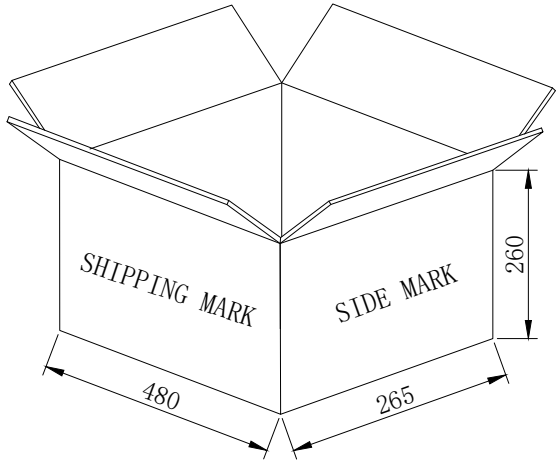

Packing:1pcs/Inner box,10pcs/Big carton

					SYNERGY 21			
					CUSTOMER		ITEM NO.	See the chart
					PRODUCT NAME	Packing	Manufacture country	CHINA UNIT mm
		NEW	2026-05-21	A0	DRAWNBY	CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2026-05-21