

Synergy 21 LED Fernbedienung Smart Panel Controller(RGB/RGBW/RGB+CCT) *Milight/Miboxer*



Smart Panel Controller RGB / RGBW / RGB CCT



Product Name: P3 Smart Panel Controller
Model No.: P3
Working Temperature: -20-60°C
Working Voltage: DC12V-24V
Output Max: 5A/Channel
Total Output Max: 15A
Output Connection: Common anode
Panel Size: 86*86mm

benötigt 2 Stück AAA Batterien, nicht im Lieferumfang enthalten

Merkmale

Merkmal	Wert
Ampere:	15
Grösse:	86*86
Lichtfarbe:	RGB-WW
Gewicht:	0.5 Kg

Weitere Bilder

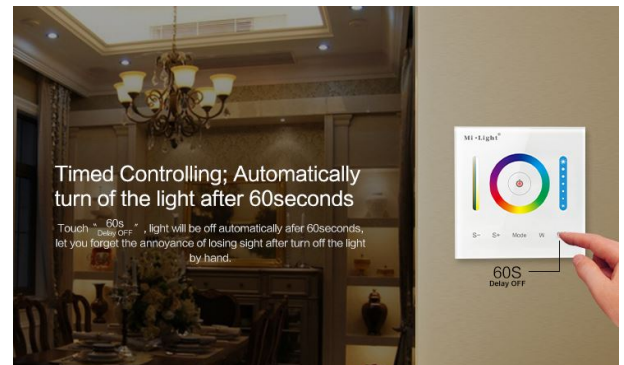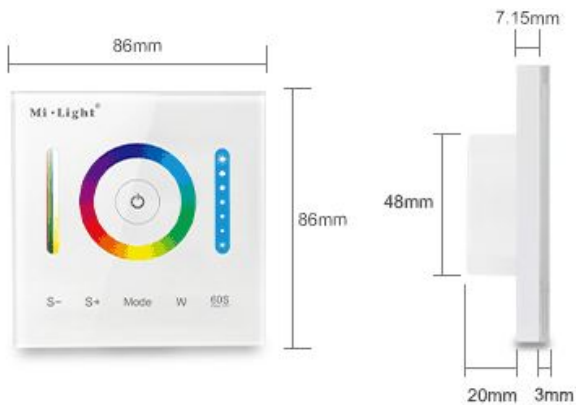


Compatiable with RGB,RGBW and RGB+CCT LED strip

Switching RGB,RGBW and RGB+CCT version randomly.



When the Light is OFF, Long press "Mode" and "W" button at the same time,The controller will sound 3 times after 5seconds,then it change to RGB version.
When the Light is OFF, Long press "W" and "60s Delay OFF" button at the same time,The controller will sound 4 times after 5seconds,then it change to RGBW version.
When the Light is OFF, Long press "Mode" and "60s Delay OFF" button at the same time,The controller will sound 5 times after 5seconds,then it change to RGB+CCT version

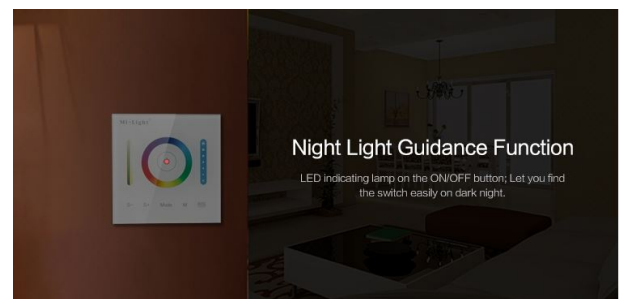

Capacitive touch screen Stable touch screen

High precision Capacitive touch screen IC, touching screen is very sensitive.



High-end safe glass panel Scratch resistance

Adopt the high-end and elegant glass panel with good crushing and scratching resistance.



Functional Diagram


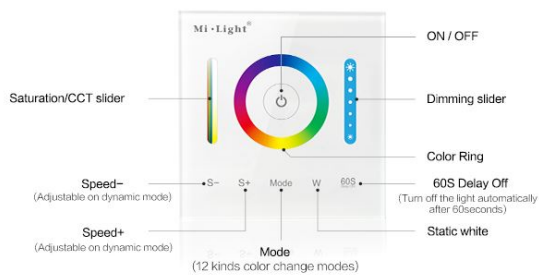


Diagram of connecting to LED strip

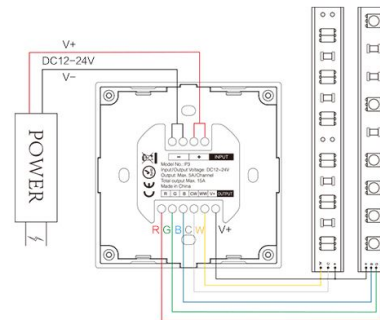

Attention:

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode.
2. The working Voltage is DC12-24V, the controller will be broken if the voltage is higher than 12-24V.
3. When installation, pls handle with care to avoid the broken of the glass panel.

COMPATIBLE REMOTE SHEET

