

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125AC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN


ENVIRONMENTAL:

1. Operation:-45°C TO +85°C
2. STORAGE: -20°C TO 60°C

MECHANICAL:

1. HOUSING MATERIAL:PA66
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6MM
4. RJ45 JACK CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED 3U
5. RJ45 JACK LIFE:750 TIMES MIN
6. WATERPROOF GRADE:IP68

FOR CABLE OD: Ø3.0-Ø8.0mm

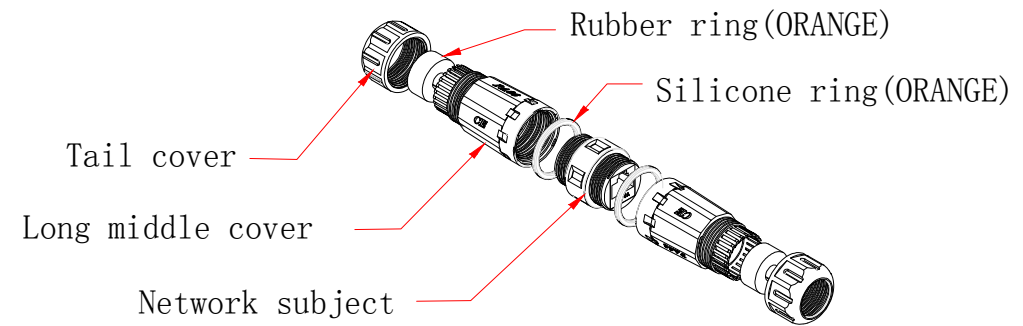

SYNERGY 21

						CUSTOMER				ITEM NO.		S215669			
						PRODUCT NAME		Cat.6A STP Female/Female Coupler IP68		MANUFACTURE COUNTRY:		CHINA	UNIT	MM	
		NEW		2020-03-24		A		DRAWNBY		CHECKBY		APPOBY		DATE	
BY	CHK	REVISION RECORD MODIFICATIONS		DATE		REV.		SYNERGY 21		SYNERGY 21		SYNERGY 21		2020-03-24	