

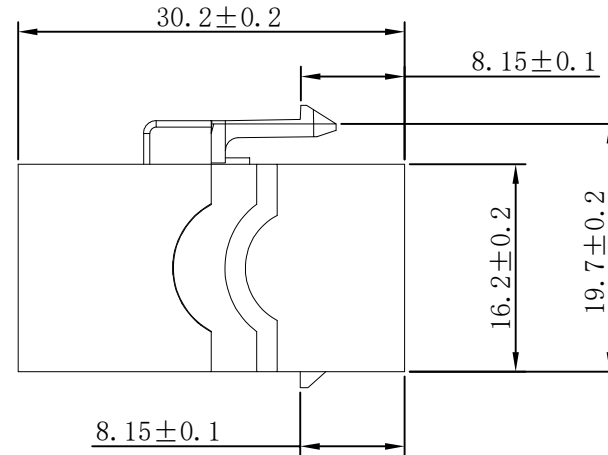


16.5±0.2

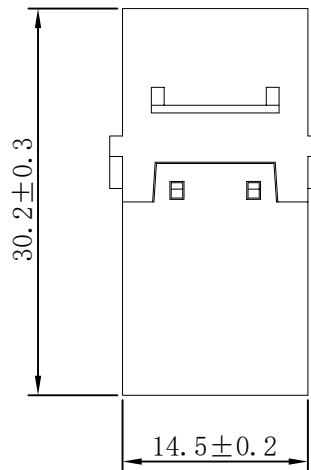

Connection Method

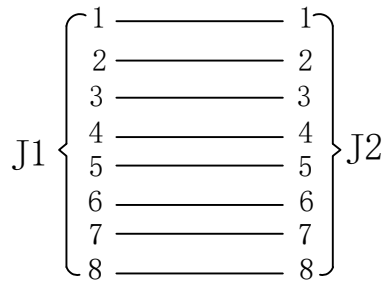

MATERIAL LIST:

④	Shrapnel	PC White	1	
③	Contact	8P8C Gold Plated	16	
②	Housing	Zinc Alloy	1	
①	PCB	FR-4, t=0.8	1	
NO	MAT. NAME	DESCRIPTION	QT'Y	REMARK

BY	CHK								

NOTES:

ELECTRICAL:

- Contact Resistance : 20MΩ MAX
- Insulation Resistance : 500MΩ MIN @ 500V DC
- Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
- Component testing for Cat.6A to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)

ENVIRONMENTAL:

- Storage : -40℃ T0+70℃
- Operation : -10℃ to+60℃

MECHANICAL

- RJ45 Contact Life: 750 Times Min
- Plug inforce:<30N

RoHS 2.0 and REACH Compliant

PACKING:1PCS/PE bag+lable1,10PCS/PE Bag+Lable 2, 50PCS/small box, xxPCS/CTN+LABLE 3

SYNERGY 21

CUSTOMER	AN	ITEM NO.	S216317V4
PRODUCT NAME	CAT.6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing	manufacture country:	CHINA UNIT MM
DRAWNBY	CHECKBY	APPOBY	DATE
SYNERGY 21	SYNERGY 21	SYNERGY 21	2025-4-2