

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125AC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-20°C TO +70°C
2. Operation:-40°C TO 85°C


MECHANICAL:

1. HOUSING MATERIAL:PA66
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6MM
4. RJ45 JACK CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED 3U
5. RJ45 JACK LIFE:750 TIMES MIN
6. WATERPROOF GRADE:IP68

Compatible cable OD: Normal 4.5-7.5mm,
Maximum support: 9mm

SinglePack: 1PC/SYNERGY 21 A bag+label;

SubPack: 10pcs/PE bag+label; Carton +labelx2;

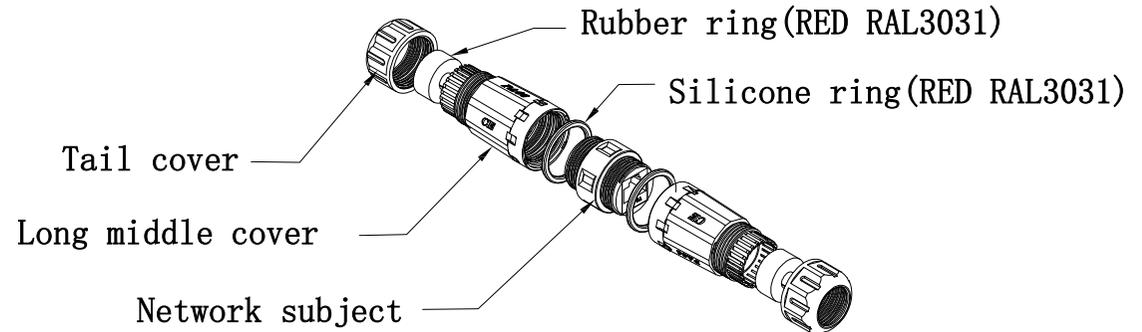

SYNERGY21

					CUSTOMER			S215669V3		
					PRODUCT NAME	IP68 Verified Outdoor Double-end Cat.6A STP RJ45 Female/Female Coupler	manufacture country:	CHINA	UNIT	MM
			NEW	2025-12-17	A					
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.	DRAWNBY	CHECKBY	APPOBY	DATE	
						SYNERGY21	SYNERGY21	SYNERGY21	2025-12-18	