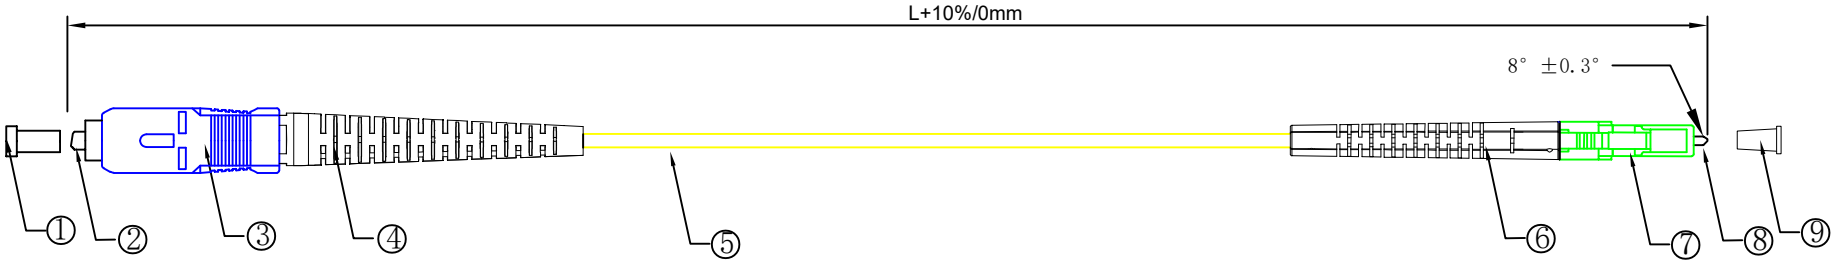

Test:

Test Grade Designation:Each to Reference		
Grade IL/RL	IEC61753 Grade B	
Insertion Loss (IL)	97%≤0.25dB mean≤0.12dB	IEC 61300-3-4
Return Loss(RL)	APC≥60dB UPC≥50dB	IEC 61300-3-6
Test Wavelength	1310nm Single-Mode	
End face inspection	×400	

NO	SPECIFICATION STANDARD	QT'Y	REMARK
⑨	LC White Dust cap	1	
⑧	LC/APC 8° Ceramic Ferrule	1	
⑦	LC/APC Green Connector	1	
⑥	LC Flex-Angle Boot White	1	
⑤	Fiber Optical Cable yellow 9/125 G657.A2 OS2 Simplex ϕ2.0mm+0/-0.2mm LSZH	XM	
④	SC Flex-Angle Boot White	1	
③	SC/UPC Blue Connector	1	
②	SC/UPC SM Ceramic Ferrule	1	
①	SC Transparent Dust cap	1	

NOTE:
1. RoHS and Reach compliant
2. Operating Temperature:-40 ~+85° C
   Storage Temperature:-40 ~+85° C
SinglePack: 1pc/SYNERGY 21 A bag/test report+label;
SubPack: no; Carton +labelx2;

ITEM NO.	Length(mm)
S215626V2	0.5
S215627V2	1.0
S215628V2	1.5
S215629V2	2.0
S215630V2	3.0
S215631V2	5.0

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2025-11-17	A0

SYNERGY 21

CUSTOMER		ITEM NO.			
PRODUCT NAME	Flex-Angle boot Patch cord Simplex OS2(G657.A2) SC/UPC - LC/APC LSZH 2.0mm	manufacture country:	CHINA	UNIT	MM
DRAWNBY	CHECKBY	APPOBY	DATE		
SYNERGY 21	SYNERGY 21	SYNERGY 21	2025-11-17		