


Synergy 21 Panel 40W IP65 620x620mm, blanco neutro



SYNERGY 21

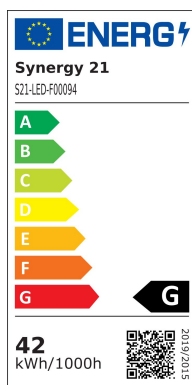

kwh/1000h:	42,00
Lúmenes:	3320
Vatio:	42,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C



- Panel Ultra fino
- Para instalar en techo o pared
- Consumo: 42W
- Color del marco: Blanco
- Número de LEDs: 480LEDs total
- Flujo luminoso: 3500lm
- CCT: 4000 ± 250K
- Ra: CRI: >85
- Protección: IP65
- Temperatura de funcionamiento: -20° hasta +50°
- Fuente de alimentación: 126355 / 122589 o similar (no incluida)
- Dimensiones: 622mm x 622mm x 13,3mm
- Corte :605mm x 605mm
- Peso: 1100g
- Clase de eficiencia energética: A
- kWh/1000h: 42
- **Garantía de 5 años**


Atributos

Atributo	Valor
Abstrahlwinkel:	120

Atributo	Valor
CRI:	80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.365
EPREL_CHROMATICITY_COORD_Y:	0.359
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	87.6
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	620
EPREL_DIMENSION_HEIGHT:	10
EPREL_DIMENSION_WIDTH:	620
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	D
EPREL_ENERGY_CONS_ON_MODE:	5
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	780
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	82
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	80

Atributo	Valor
EPREL_POWER_ON_MODE:	8.4
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	29
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Grösse:	620*620
LED - Gehäusefarbe:	weiß
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4000
Lumen:	3500
Schutzklasse:	IP65
Peso:	4.6 Kg
Garantía:	60.00 Meses

Imágenes adicionales

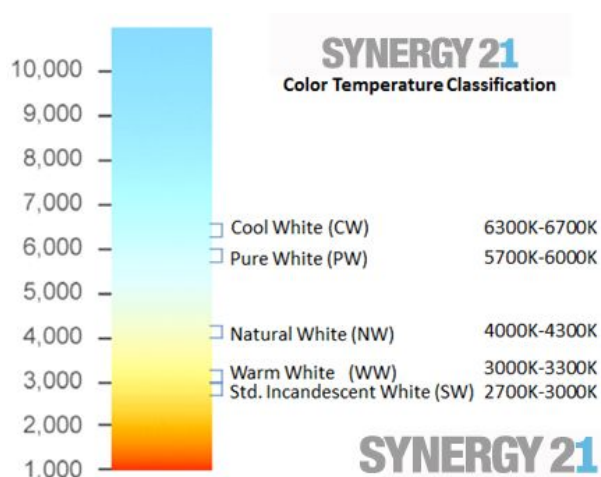

Accesorios

Número de artículo	Denominación
126355	Mean Well LPV-60-24 Alimentación 24V/60W IP67
132105	Synergy 21 LED light panel zub Montage Kit Clip für IP65 Panel
132106	Synergy 21 LED light panel zub Montage Kit Wand für IP65 Panel
148726	Synergy 21 Outdoor Kabelverbinder IP68 1:1
148727	Synergy 21 Outdoor Kabelverbinder IP66 1:2
148730	Synergy 21 Outdoor Kabelverbinder IP66 Box 3 Ports
148729	Synergy 21 Outdoor Kabelverbinder IP68 Box 3 Ports transparent
148728	Synergy 21 Netzteil - Wasserdichte Verbinder Box 4 Ports
115936	Synergy 21 LED light panel zub Emergency Battery Pack
134899	Osram EBN-OS Limitador de corriente de arranque
151276	Synergy 21 LED light panel zub Montage Einbaurahmen 620*620 weiß
157036	Synergy 21 Alimentación para Panel LED 620*620
188176	Synergy 21 Fuente de alimentación 35W