
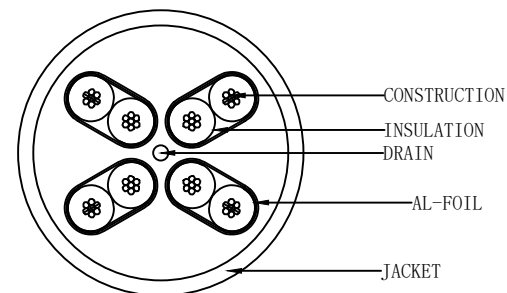


CAT6A U/FTP 4x2x32AWG/7 TPE/LSZH ISO11801 & EN50173 & ANSI/TIA568C.2 www.Synergy21.de **CE**

PIN OUT

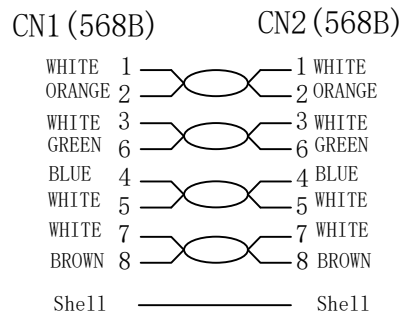

MATERIAL LIST

NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. ROHS 3.0 AND REACH compliant
3. Electrical test: 100% open short & miss wire test;
4. Operating temperature: -20°C ~ +75°C
5. Minimum of the bending radius is 30mm
6. Flame retardant (IEC60332-1-2)
Low smoke (IEC 61034)
Halogen free (IEC 60754-2)

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
③	CABLE	CAT. 6A U/FTP CABLE (32AWG BC*1P+AL-FOIL)*4+DRAIN+JACKET:LSZH-TPE, OD:3.8±0.2mm	1	
②	Over mold	75A PVC	2	
①	Plug	RJ45 8P8C Shielded Plug, PIN GOLD PLATED 3u", THE SHELL PLATED NICKEL, TRANSPARENT BLUE	2	

Hasia		change ITEM NO.	2022-03-21	A3	SYNERGY 21					
Hasia		change "ROSH 2.0" to "ROSH 3.0"	2022-02-25	A2	CUSTOMER		ITEM NO.	See The Chart		
		Change the Jacket	2022-02-14	A1	PRODUCT NAME	Cat. 6A U/FTP Patch cord Slim Type LSZH-TPE	manufacture country:	CHINA	UNIT	MM
		NEW	2021-01-23	A	DRAWNBY	CHECKBY	APPROVE	DATE		
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2021-01-23		

