


Synergy 21 LED Retrofit GU10 6W RGB-WW (RGB-CCT) Spot *Milight/Miboxer*



kwh/1000h:	6,00
Lumen:	570
Watt:	6,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C

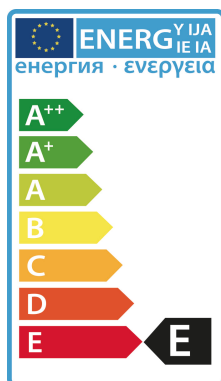

GU10 Retrofit Spot RGB+CCTSteuerbar mit Funkfernbedienung und/oder WLAN Controller für iOS und Android, beide separat erhältlich, siehe Zubehör

Product Name: 6W GU10 RGB+CCT LED Spotlight

Model No.: FUT106

Power: 6W

Voltage: AC100~240V 50/60Hz

Working Temp.: -20~60°C

Color Temp.: 2700K~6500K

Luminous Flux: 550LM

Luminous Efficiency: 90LM/W

CRI: >80

PF: 0.55

Lifespan: 50000h

Beam Angle: 30°

RF: 2.4GHz

Transmitting Power: 6dBm

Control Distance: 30m

Energieeffizienzklasse: A+


kWh/1000h: 6

Merkmale

Merkmale	Wert
Abstrahlwinkel:	30
Dimmbar:	Ja
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	30
EPREL_BEAM_ANGLE_CORRESPONDENCE:	NARROW_CONE_90
EPREL_CAP_TYPE:	GU10
EPREL_CHROMATICITY_COORD_X:	0.313
EPREL_CHROMATICITY_COORD_Y:	0.337
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_CONSISTENCY:	4
EPREL_COLOUR_RENDERING_INDEX:	80
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	true
EPREL_CORRELATED_COLOUR_TEMP:	2700,6500
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	50
EPREL_DIMENSION_HEIGHT:	73
EPREL_DIMENSION_WIDTH:	50
EPREL_DIMMABLE:	YES
EPREL_DIRECTIONAL:	DLS
EPREL_DISPLACEMENT_FACTOR:	0.55
EPREL_ENERGY_CLASS:	E
EPREL_ENERGY_CONS_ON_MODE:	6
EPREL_FLICKER_METRIC:	0.6
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.55
EPREL_LUMINOUS_FLUX:	570
EPREL_MAINS:	MLS

Merkmal	Wert
EPREL_MAX_COLOUR_RENDERING_INDEX:	93
EPREL_MIN_COLOUR_RENDERING_INDEX:	80
EPREL_ON_MARKET_END_DATE:	47849
EPREL_ON_MARKET_START_DATE:	43831
EPREL_POWER_ON_MODE:	6.0
EPREL_POWER_STANDBY:	0.50
EPREL_POWER_STANDBY_NETWORKED:	0.50
EPREL_R9_COLOUR_RENDERING_INDEX:	4
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_STROBOSCOPIC_EFFECT_METRIC:	0.6
EPREL_SURVIVAL_FACTOR:	0.55
Grösse:	55*72
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	550
Volt:	230
Gewicht:	0.15 Kg

Weitere Bilder

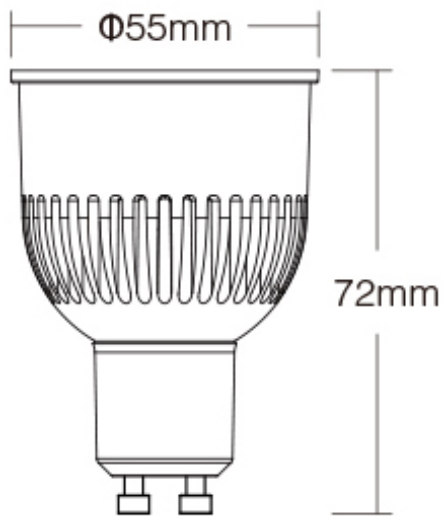

Color temperature and brightness adjustable randomly

Color temperature and brightness adjustable making many kinds of lighting atmosphere




Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 30m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

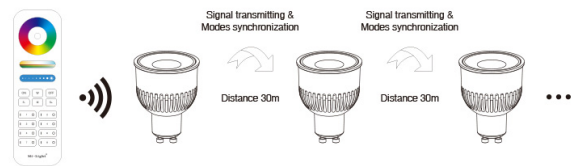

High lumen LED Chips

Low power consumption and luminance decrease; Bright color and high brightness



Lamp Body
Aluminum+Plastic

Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray

COMPATIBLE REMOTE SHEET

Product	Compatible Remote

Zubehör

Art.-Nr.	Name
147981	Synergy 21 LED Fernbedienung RGB-WW (RGB-CCT) 8 Zonen *Milight/Miboxer*
147982	Synergy 21 LED Fernbedienung RGB-WW (RGB-CCT) 4 Zonen *Milight/Miboxer*
148005	Synergy 21 LED Fernbedienung Smart Panel RGB-WW (RGB-CCT) 4 Zonen *Milight/Miboxer*
148006	Synergy 21 LED Fernbedienung Smart Panel RGB-WW (RGB-CCT) 8 Zonen *Milight/Miboxer*
150705	Synergy 21 LED Fassung GU10 Deckenmontage
150706	Synergy 21 LED Fassung GU10 Deckenmontage schwenkbar
150707	Synergy 21 LED Fassung GU10 Deckenmontage abgehängt
150708	Synergy 21 LED Fassung GU10 Track-Serie für Stromschiene 01
150709	Synergy 21 LED Fassung GU10 Track-Serie für Stromschiene 02
81943	Synergy 21 LED Adapter für LED-Leuchtmittel E27->GU10
111327	Synergy 21 LED Fassung E27 100cm orange
111328	Synergy 21 LED Fassung E27 100cm blau
111329	Synergy 21 LED Fassung E27 100cm lila
111330	Synergy 21 LED Fassung E27 100cm grün
111332	Synergy 21 LED Fassung E27 100cm gelb