


Synergy 21 LED Subordinate Poolleuchte 12W RGB+CCT mit Funk und WLAN *Milight/Miboxer*



kwh/1000h:	13,20
Lumen:	1100
Watt:	12,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C



Product Name: RGB+CCT LED Underwater Light (Subordinate Lamp)
Model No.: SYS-RW1
Input Voltage: DC24V
Power: 12W
Working Temperature: -20~60°
Color temperature: 2700~6500K
Luminous Flux: 1000LM
Light Efficiency: 85LM/W
CRI: >80
Lifespan: 50000h
Beam Angle: 160°
IP Rate: IP68
Housing Material: Stainless Steel+PC

Energieeffizienzklasse: A+
kWh/1000h: 13,2

Merkmale


Merkmal	Wert
Abstrahlwinkel:	160

Merkmal	Wert
Ampere:	0.50
CC oder CV:	CV
Dimmbar:	Ja
Grösse:	220*50
LED - Gehäusematerial:	Stahl
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	1000
Schutzklasse:	IP68
Volt:	24
Gewicht:	0.5 Kg

Weitere Bilder

Product Parameters

Product Name: RGB+CCT LED Underwater Light
(Subordinate Lamp)
Model No.: SYS-RW1
Input Voltage: DC24V
Power: 12W
Working Temperature: -20~60°C
Color temperature: 2700~6500K
Luminous Flux: 1000LM
Light Efficiency: 85LM/W
CRI: >80
Lifespan: 50000h
Beam Angle: 160°
IP Rate: IP68
Housing Material: Stainless Steel+PC





Stalinite housing

High quality stainless steel materials; not easy to fade and sunproof



High quality PC cover

Strong hardness, high lighting transmitting rate; Wide illumination distance




High lumen LED Chips

High lumen LED chips; Low power consumption and luminance decrease; Bright color and high brightness

Built-up designing

High quality stainless steel materials; Built-up designing; Easy-installation




Silicone rubber sealing ring

Fully waterproofness make sure the lighting lifespan



Connection Diagram

Note: The "SYS-T1 Controller" has to be purchased separately

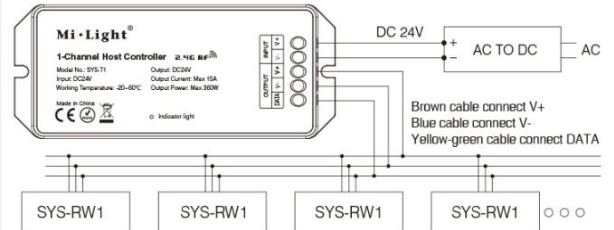















Note: When using "SYS-T1 controller", you need to add "SYS-T2 1-channel signal amplifier" for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over 360W.

All connected lights to "SYS-T1 Controller" cannot be over 360W, otherwise, it will damage the controller.

COMPATIBLE REMOTE SHEET

Product	Compatible Remote
	
	
	
	

Zubehör

Art.-Nr.	Name
158699	Synergy 21 LED Subordinate Garten Lampe 15W RGB+CCT mit Funk und WLAN IP65 24V Milight/Miboxer*
158700	Synergy 21 LED Subordinate Garten Lampe 9W RGB+CCT mit Funk und WLAN IP65 24V *Milight/Miboxer*
158702	Synergy 21 LED Subordinate Poolleuchte 12W RGB+CCT mit Funk und WLAN *Milight/Miboxer*
158703	Synergy 21 LED Subordinate Wandfluter 24W RGB+CCT IP66 24V *Milight/Miboxer*
158704	Synergy 21 LED Subordinate Controller 1-Channel Amplifier *Milight/Miboxer*
158705	Synergy 21 LED Subordinate Controller 1-Channel Host *Milight/Miboxer*
158962	Synergy 21 LED Subordinate Kabel/Stecker SYS Serie *Milight/Miboxer*
158963	Synergy 21 LED Subordinate Kabel/Stecker SYS Serie *Milight/Miboxer*
158964	Synergy 21 LED Subordinate Kabel/Stecker SYS Serie *Milight/Miboxer*
158965	Synergy 21 LED Subordinate Kabel/Stecker SYS Serie *Milight/Miboxer*