


SYNERGY 2 [®] pantone black C

1 pantone blue 298C


NOTE:

1. PANEL FRAME:SPCC CARBON STEEL T=1.2MM POWDER COATING
2. PANEL BRACKET SPCC NICKEL PLATING
3. BODY COLOR: Gray "1 2 3.....24" Color: black Font : Arial H:4.4MM
4. Accessory:
 1. Cable Tie(75X1.9mm) *24pcs
 2. Screw and Nut M6*18mm × 2set

SYNERGY 21											
CUSTOMER			ITEM NO.			S216333					
PRODUCT NAME		19" 0.5U 24 ports blank Patch panel Three-piece type			MANUFACTURE COUNTRY:		CHINA		UNIT	MM	
NEW			2016-1-15		A		DRAWNBY		CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2016-1-15	

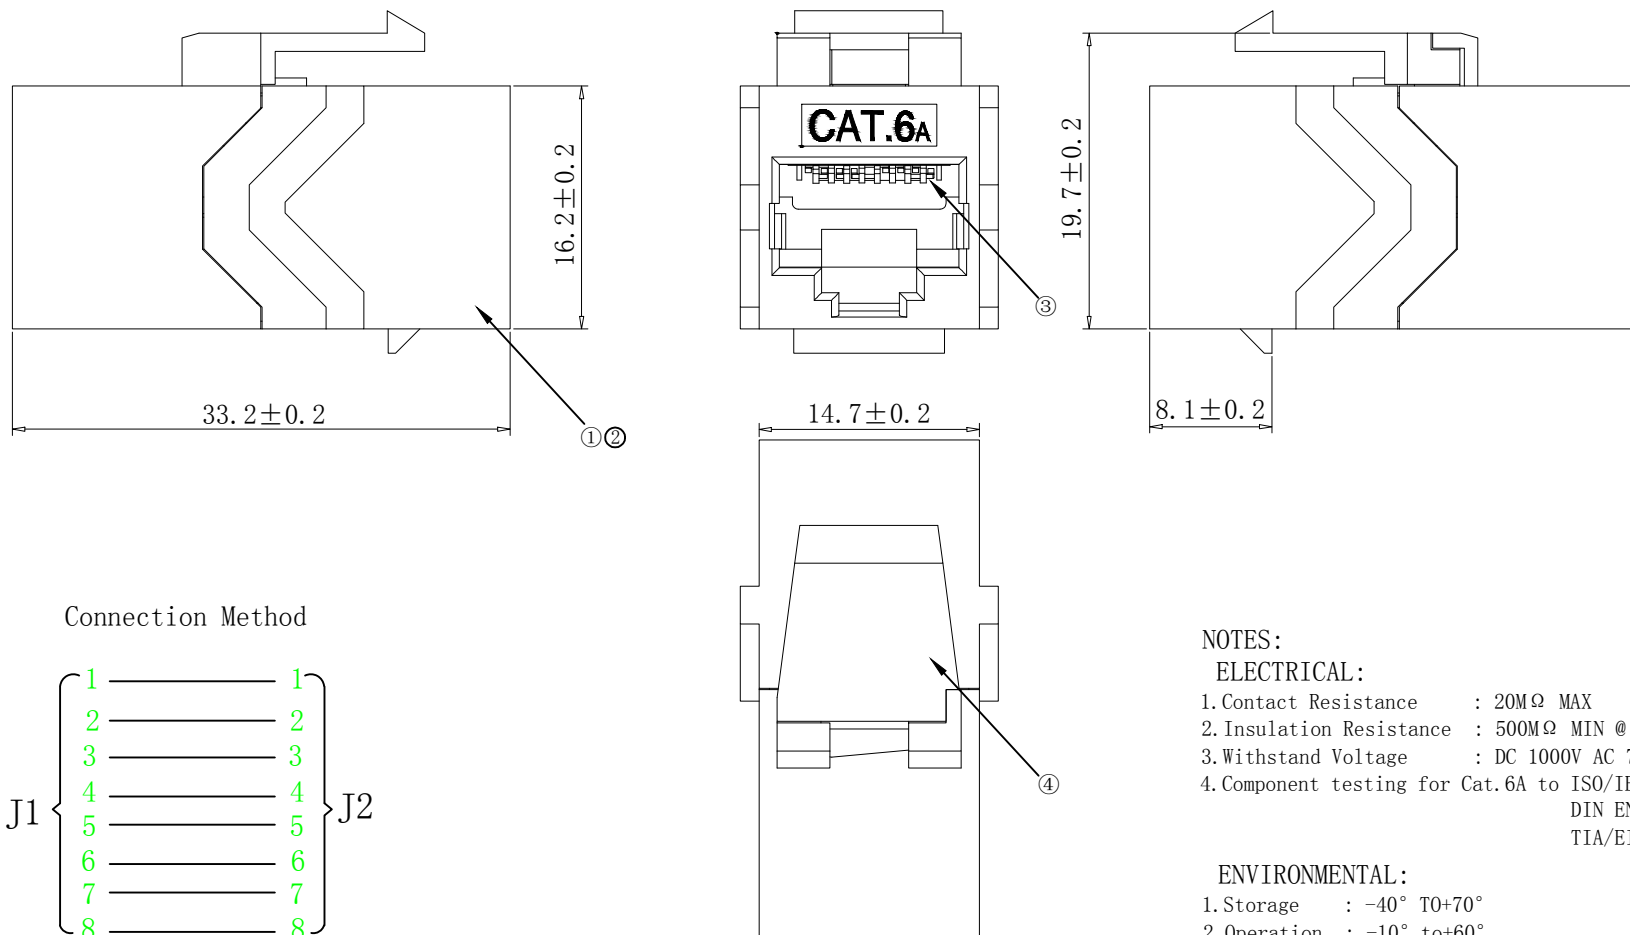

Connection Method

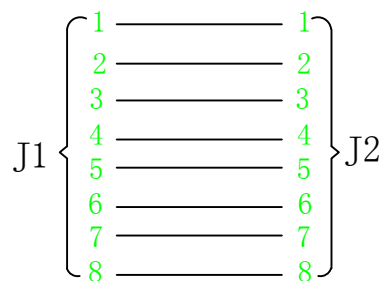

NOTES:

ELECTRICAL:

1. Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat.6A to ISO/IEC 11801 Ed. 2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568-C.2 (2009-08)

ENVIRONMENTAL:

1. Storage : -40° T0+70°
2. Operation : -10° to+60°

MECHANICAL

1. RJ45 Contact Life: 750 Times Min
 2. Plug inforce: <30N
- RoHS 2.0 and REACH Compliant
PACKING: 1PCS/PE bag+Label 1, 10PCS/PE Bag+Label 2, 50PCS/small box, xxPCS/CTN+LABEL 3

MATERIAL LIST:

④	Shrapnel	PC White	1	
③	Contact	8P8C Gold Plated	16	
②	Housing	Zinc Alloy	1	
①	PCB	FR-4, t=0.8	1	
NO	MAT. NAME	DESCRIPTION	QT' Y	REMARK

SYNERGY 21									
CUSTOMER		AN		ITEM NO.		S216317V3			
PRODUCT NAME		CAT. 6A STP RJ45 F/F Coupler Keystone jack Type Zinc Alloy Housing		manufacture country:		CHINA	UNIT	MM	
NEW			2019/09/03	A0	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.	SYNERGY 21	SYNERGY 21	SYNERGY 21	2019/09/03